


MINIMESS®-DN 2 microbore hose assemblies

For 1620, 1615, 1215 and plug-in series

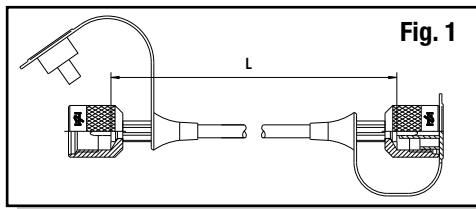

The tables show the series 1620

- Suitable for hydraulic and other oils on mineral oil basis
- Same fittings on both sides
- Fittings made of free cutting steel 1.0718

| L | p max | Part-number | p max | Part-number |
|------|--------|------------------|--------|------------------|
| 200 | 40 MPa | S 100-AC-AC-0020 | 63 MPa | S 110-AC-AC-0020 |
| 300 | | S 100-AC-AC-0030 | | S 110-AC-AC-0030 |
| 400 | | S 100-AC-AC-0040 | | S 110-AC-AC-0040 |
| 500 | | S 100-AC-AC-0050 | | S 110-AC-AC-0050 |
| 630 | | S 100-AC-AC-0063 | | S 110-AC-AC-0063 |
| 800 | | S 100-AC-AC-0080 | | S 110-AC-AC-0080 |
| 1000 | | S 100-AC-AC-0100 | | S 110-AC-AC-0100 |
| 1250 | | S 100-AC-AC-0125 | | S 110-AC-AC-0125 |
| 1500 | | S 100-AC-AC-0150 | | S 110-AC-AC-0150 |
| 2000 | | S 100-AC-AC-0200 | | S 110-AC-AC-0200 |
| 2500 | | S 100-AC-AC-0250 | | S 110-AC-AC-0250 |
| 3200 | | S 100-AC-AC-0320 | | S 110-AC-AC-0320 |
| 4000 | | S 100-AC-AC-0400 | | S 110-AC-AC-0400 |
| 5000 | | S 100-AC-AC-0500 | | S 110-AC-AC-0500 |

| | | | | |
|--|--|---|---------|---|
| Fittings made of stainless steel 1.4571 | | Exchange number 1 to 7, when ordering | 7 | 7 |
| Series 1215 (picture 1) (fixing thread) | | When ordering, replace the letter codes with -AA-AA-. | -AA-AA- | |
| Series 1615 (picture 1) (M 16 x 1,5) | | When ordering, replace the letter codes with -AB-AB-. | -AB-AB- | |
| Plug-in series Max. pressure 40,0 MPa | | When ordering, replace the letter codes with -AI-AI-. | -AI-AI- | |

DN 2 measuring hoses with protection against leakage with integrated return valve

| | | | | | |
|----------------------|--|--|---------|--|---------|
| Series 1620 (M 16x2) | | When ordering, replace both letter codes with -AR-AR-. | -AR-AR- | | -AR-AR- |
|----------------------|--|--|---------|--|---------|

Lmin = 300 mm